
sun-breaker




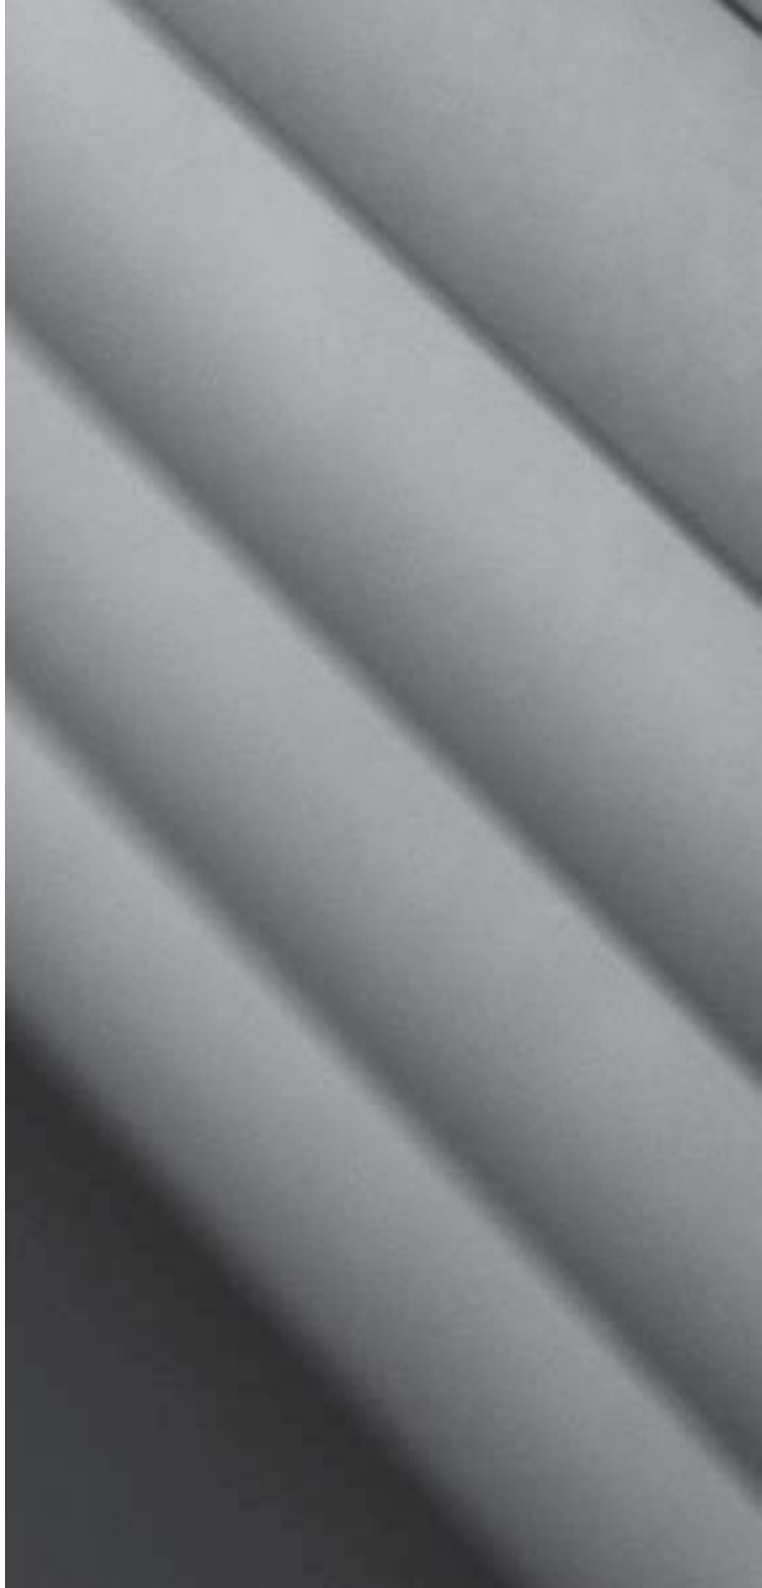

Properties:

- Lightweight blades made from extruded aluminium
- Enables shading horizontal and vertical surfaces
- Application of brackets mounted directly to the base allows to choose distance of blades during installation, no need to define it at the order stage
- Brackets are made of extruded aluminium, they provide high endurance and fast installation
- Ability to select one of predefined blade angles 30–120° (each 15°)
- Blades end caps made from aluminium can be painted in any colour from RAL palette
- System can be painted in any colour from RAL palette

construction colour	RAL
electric drive	no
manual drive	no
maximum lenght of blade	7.0 m
maximum height	-
application external	yes
application internal	no
the ability to change the angle of blades	yes *(predefined)*

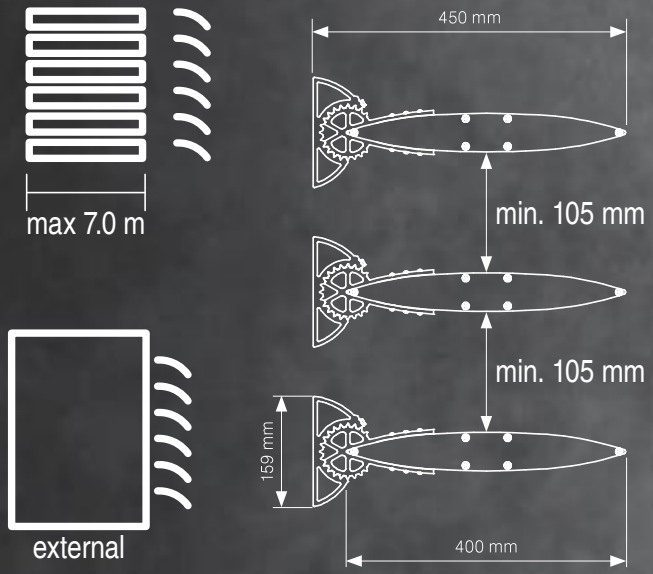

system

sunbreaker 400 *fixed*








Properties:

- Construction made from extruded aluminium
- Elliptic blades width of 300 mm
- Group installation option
- Blade rotation range from 0 to 100°
- Operated by linear motor
- The blades bearings in the guides as well as the construction of the drive elements ensure noiseless operation of the system when blades are rotating
- System is installed onto external supporting facade construction
- Construction can be painted in any colour from RAL palette


construction colour	RAL
electric drive	yes
manual drive	no
maximum width	4.5 m
maximum height	7.0 m
application external	yes
application internal	no
the ability to change the angle of blades	yes





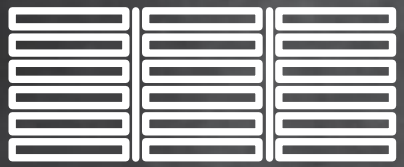

group installation

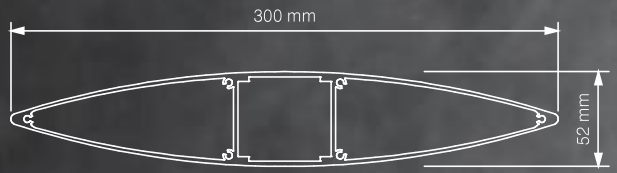

system

sunbreaker 300 rotary




HOME MOTION by
somfy
somfy
TaHomA
io
homecontrol
RTS
Radio Technology Somfy
LCN
Local Control Network
STANDARD
MOTOR INTERFACE
BBSA


system

sunbreaker 300 fixed

Properties:

- Lightweight blades made from extruded aluminium
- Enables shading horizontal and vertical surfaces
- Elyptic blade width of 300 mm
- Application of brackets mounted directly to the base allows to choose distance of blades during installation, no need to define it at the order stage
- Brackets are made of extruded aluminium, provide high endurance and fast installation
- Ability to select one of predefined blade angles 30–120° (each 15°)
- Blades end caps made from aluminium can be painted in any colour from RAL palette
- System can be painted in any colour from RAL palette

construction colour	RAL
electric drive	no
manual drive	no
maximum width	7.0 m
maximum height	-
application external	yes
application internal	no
the ability to change the angle of blades	yes *(predefined)*

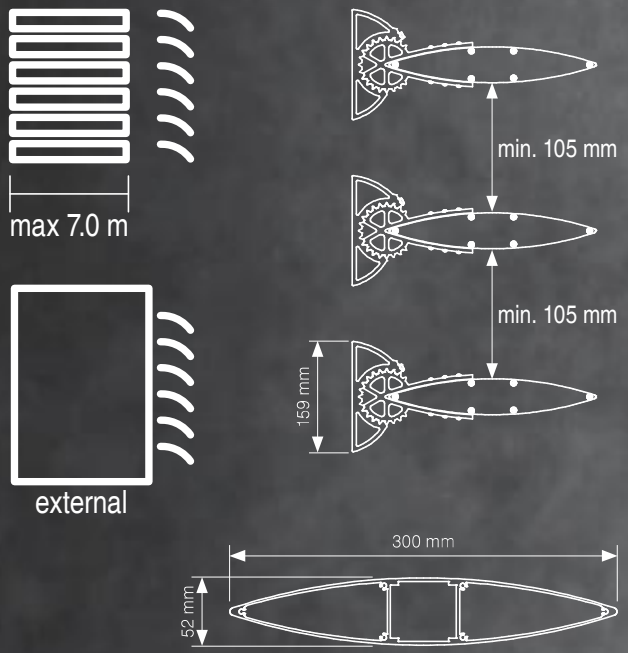








Properties:

- Construction made from extruded aluminium
- Two types of 210 mm width blades:
  Type A blade is designed for horizontal surfaces (roofing, skylights). Owing to the special shape of the blade when in the closed position, it provides protection from rain. Type B blade is designed for shading horizontal and vertical surfaces (building facades, pergola walls)
- Lightweight aluminium construction for strenght and durability
- Blade rotation range from 0 to 90°
- It can be fixed both horizontally and vertically
- Group installation option
- Tilt angle of blades operated by linear motor
- Construction can be painted in any colour from RAL palette

construction colour	RAL
electric drive	yes
manual drive	yes
maximum width	4.0 m
maximum height	6.02 m
application external	yes
application internal	no
the ability to change the angle of blades	yes

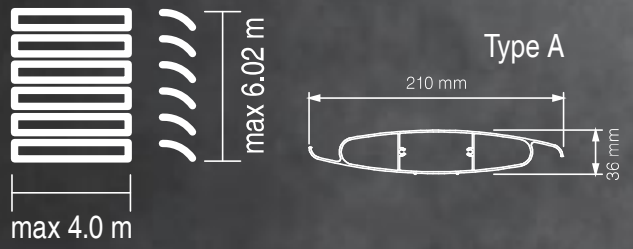







system

sunbreaker 210 rotary

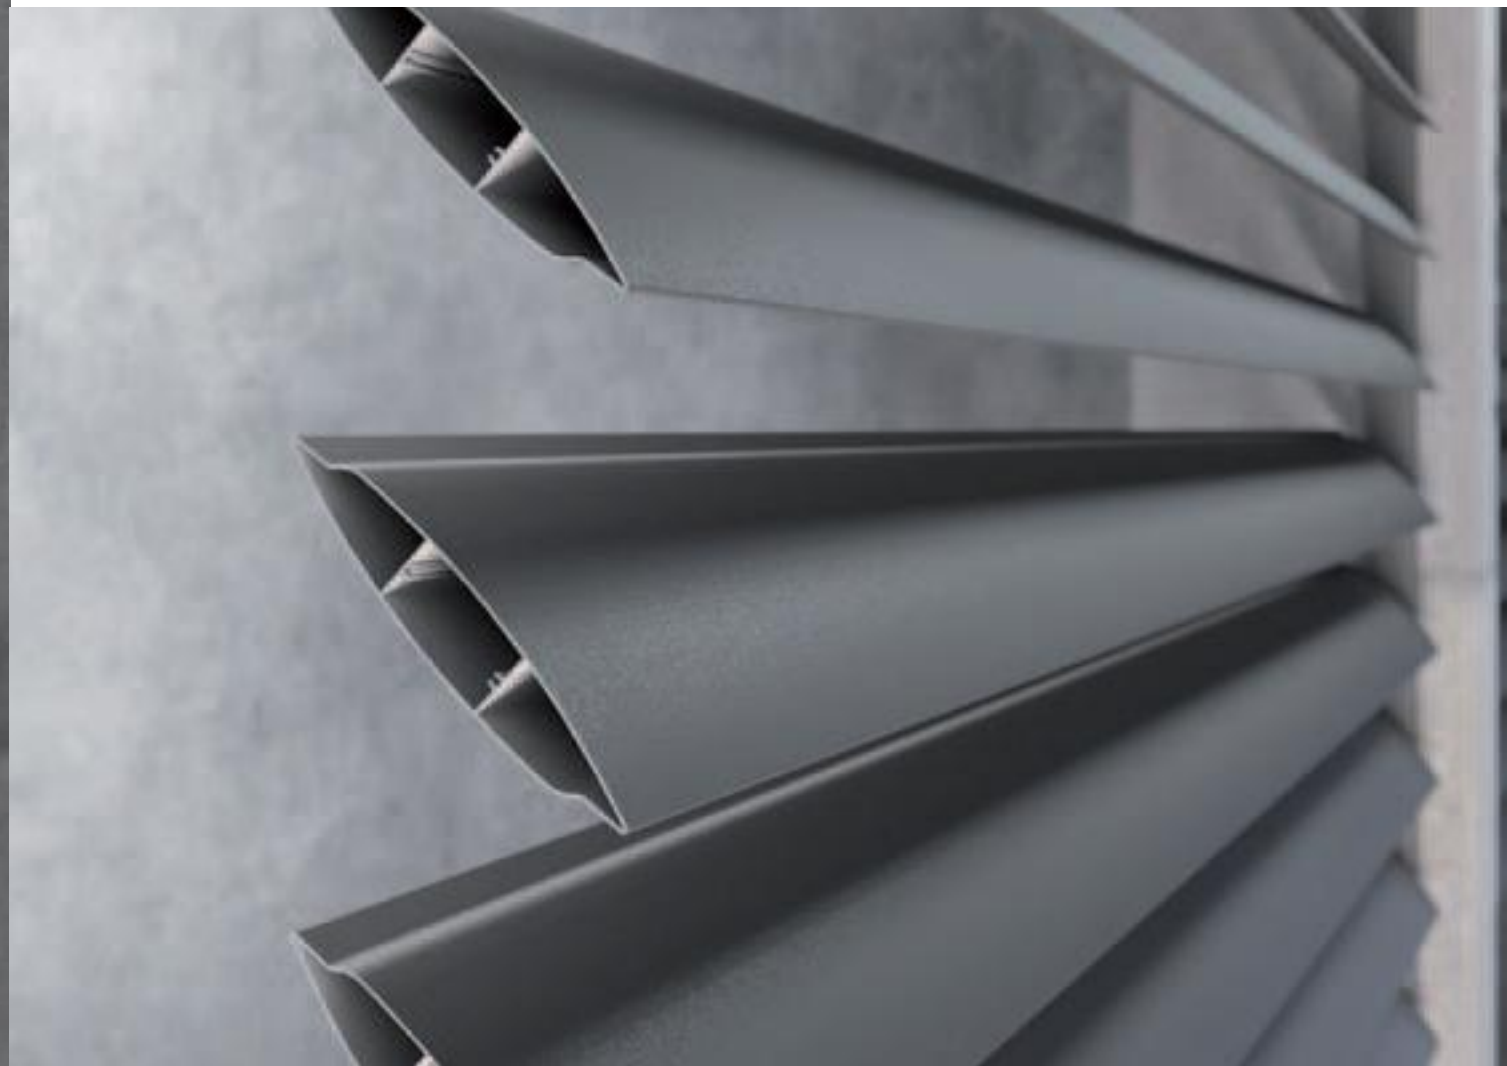

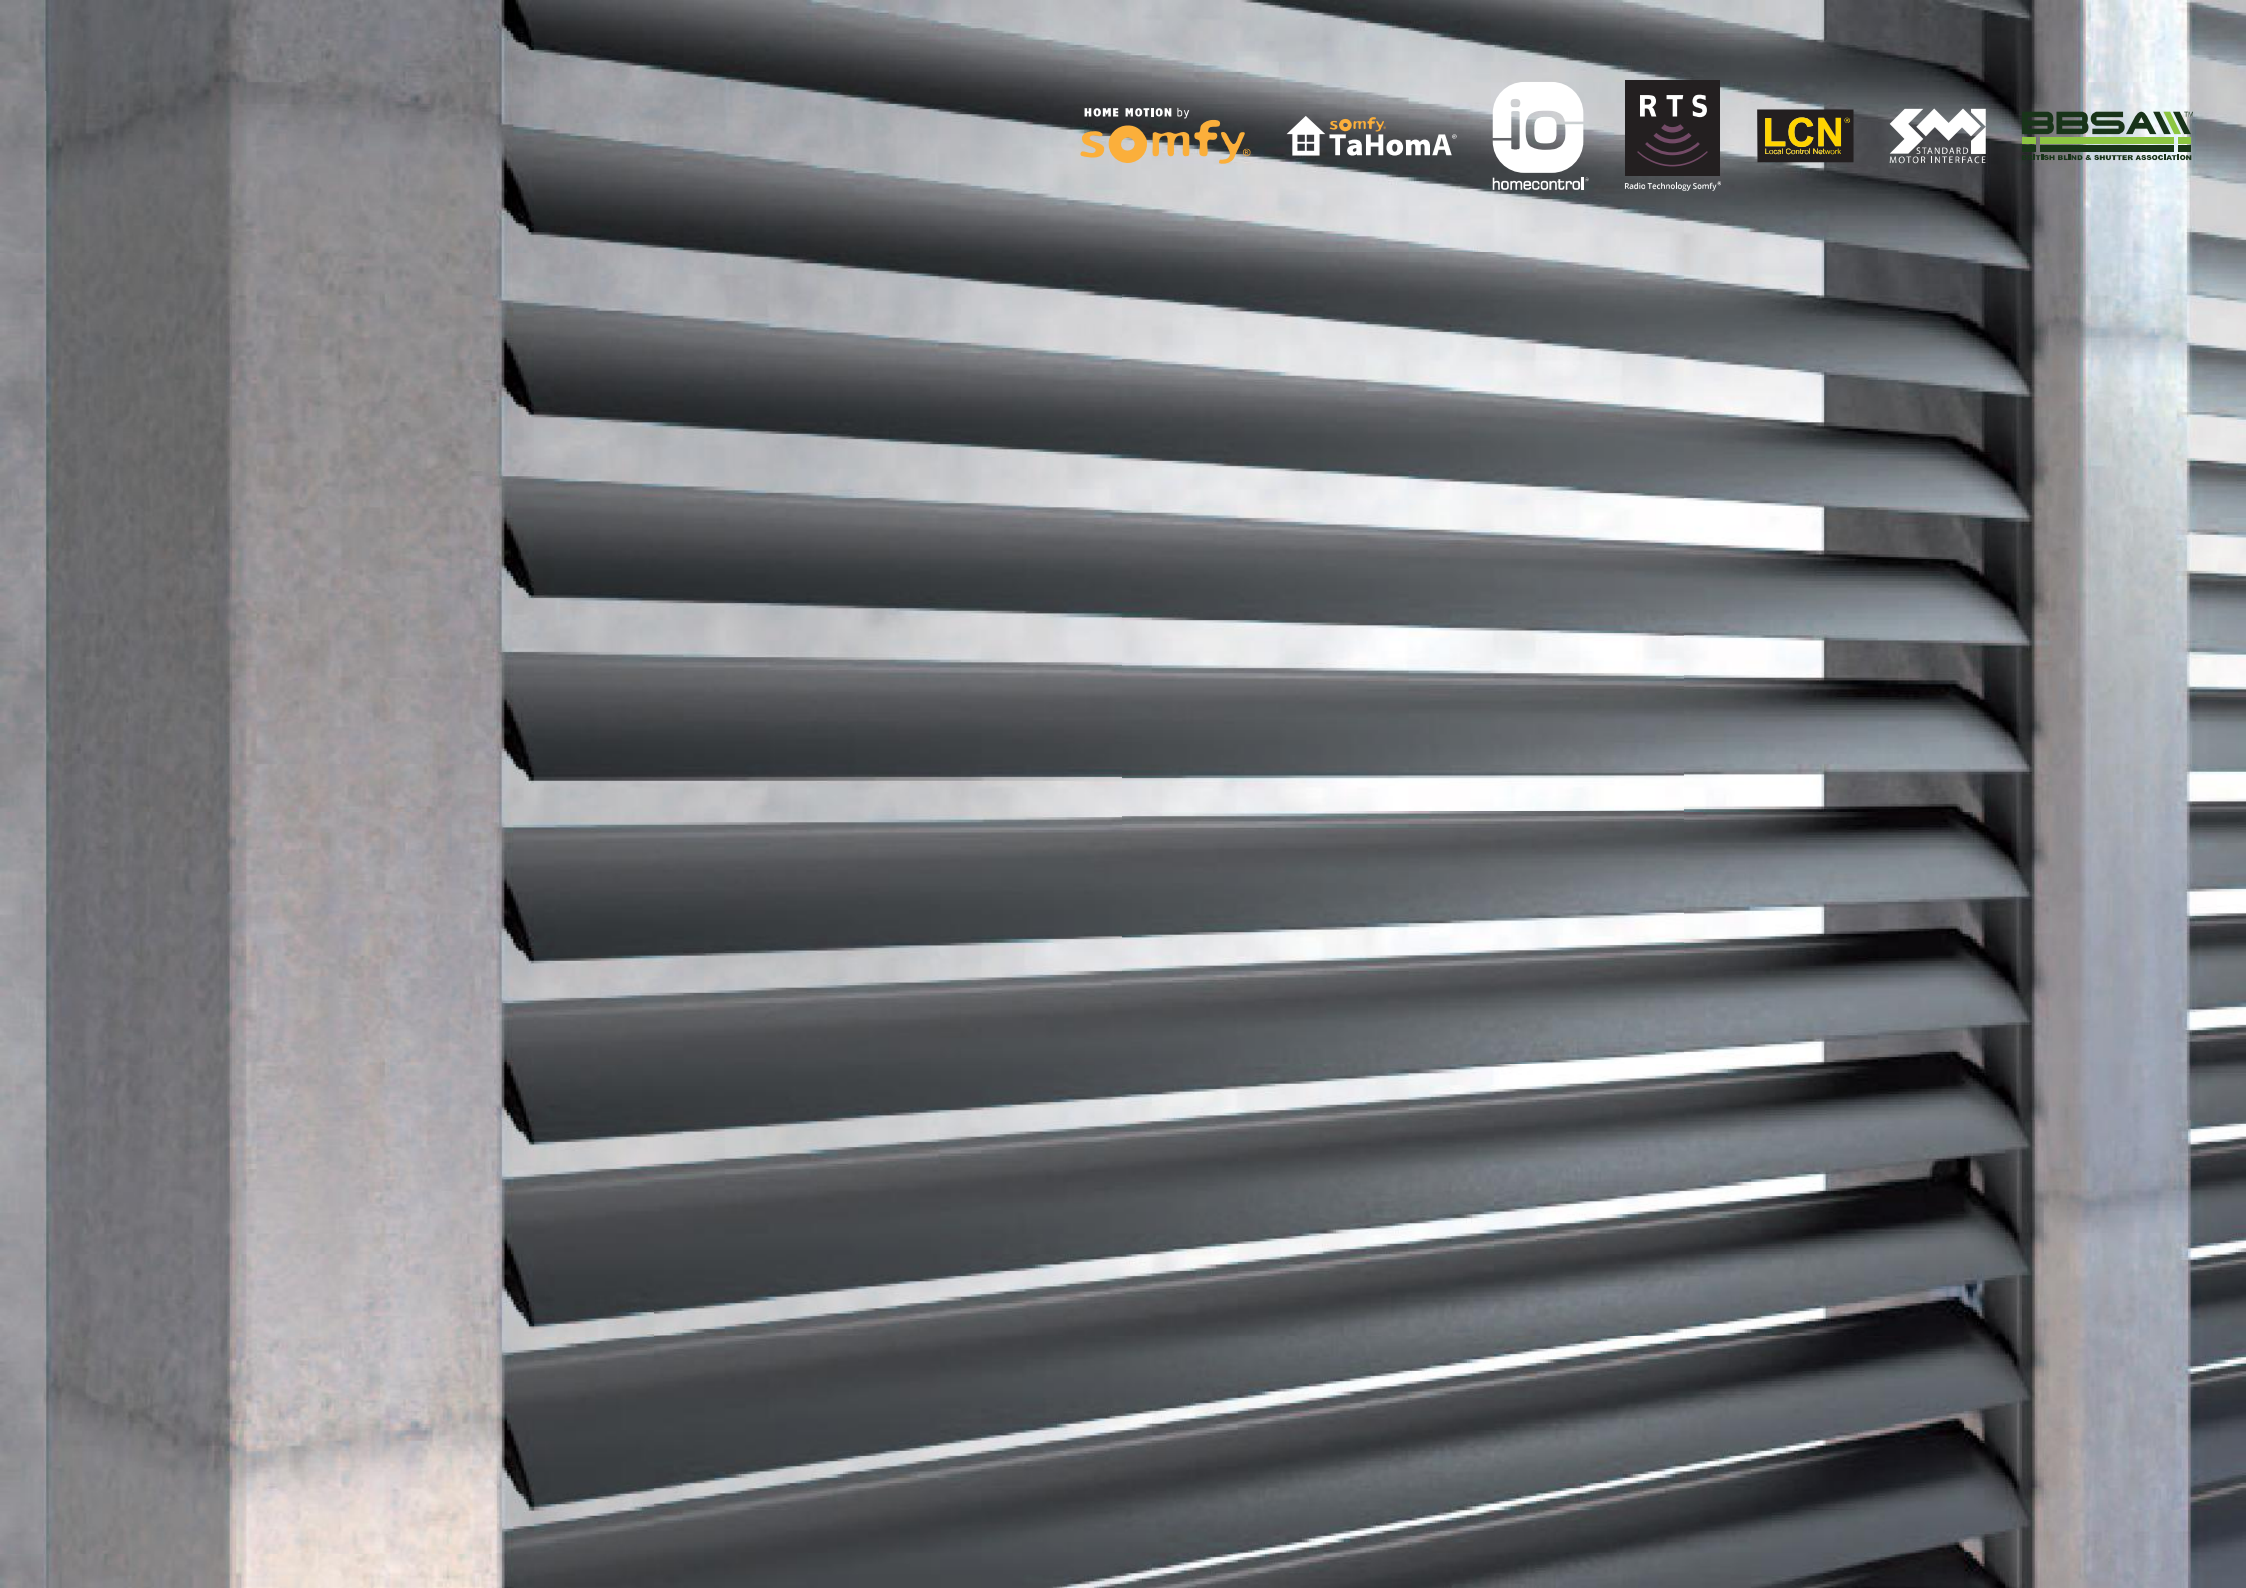
HOME MOTION by
somfy
somfy
TaHomA
io
homecontrol
RTS
Radio Technology Somfy
LCN
Local Control Network
STANDARD
MOTOR INTERFACE
BBSA
BRITISH BLIND & SHUTTER ASSOCIATION

system

sunbreaker 210 fixed


Properties:

- Construction made from extruded aluminium
- Elyptic blades 210 mm wide
- Enables shading horizontal and vertical surfaces
- Application of brackets mounted directly to the base allows to choose distance of blades during installation, no need to define it at the order stage
- Brackets are made of extruded aluminium, provide high endurance and fast installation
- Ability to select one of predefined blade angles 0–60° (each 15°)
- Blades end caps made from aluminium can be painted in any colour from RAL palette
- System can be painted in any colour from RAL palette

construction colour	RAL
electric drive	no
manual drive	no
maximum width	7.0 m
maximum height	-
application external	yes
application internal	no
the ability to change the angle of blades	yes *(predefined)*





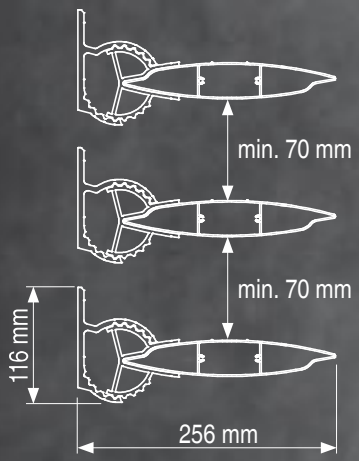








Properties:

- Lightweight and durable blades made of extruded aluminium
- Using aluminium rail guides and spacers allows for fast installation
- Blade brackets made from extruded aluminium ensure high durability and fast installation without having to use any special tools
- Fixed angle of the blades
- Three types of blades (C115, C160, Z154)
- One type of bracket is used for all of the blades ensuring great versatility of the system
- Spacers of different length allow you to adjust the size of the gap between the blades to fit the user's needs and local weather conditions
- Construction can be painted in any colour from RAL palette

construction colour	RAL
electric drive	no
manual drive	no
maximum length of the blade	7.0 m
maximum height	7.0 m
application external	yes
application internal	no
the ability to change the angle of blades	no






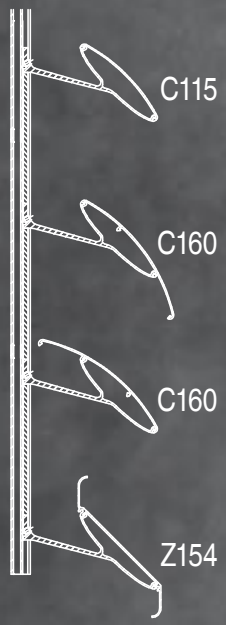

system

sunbreaker clip

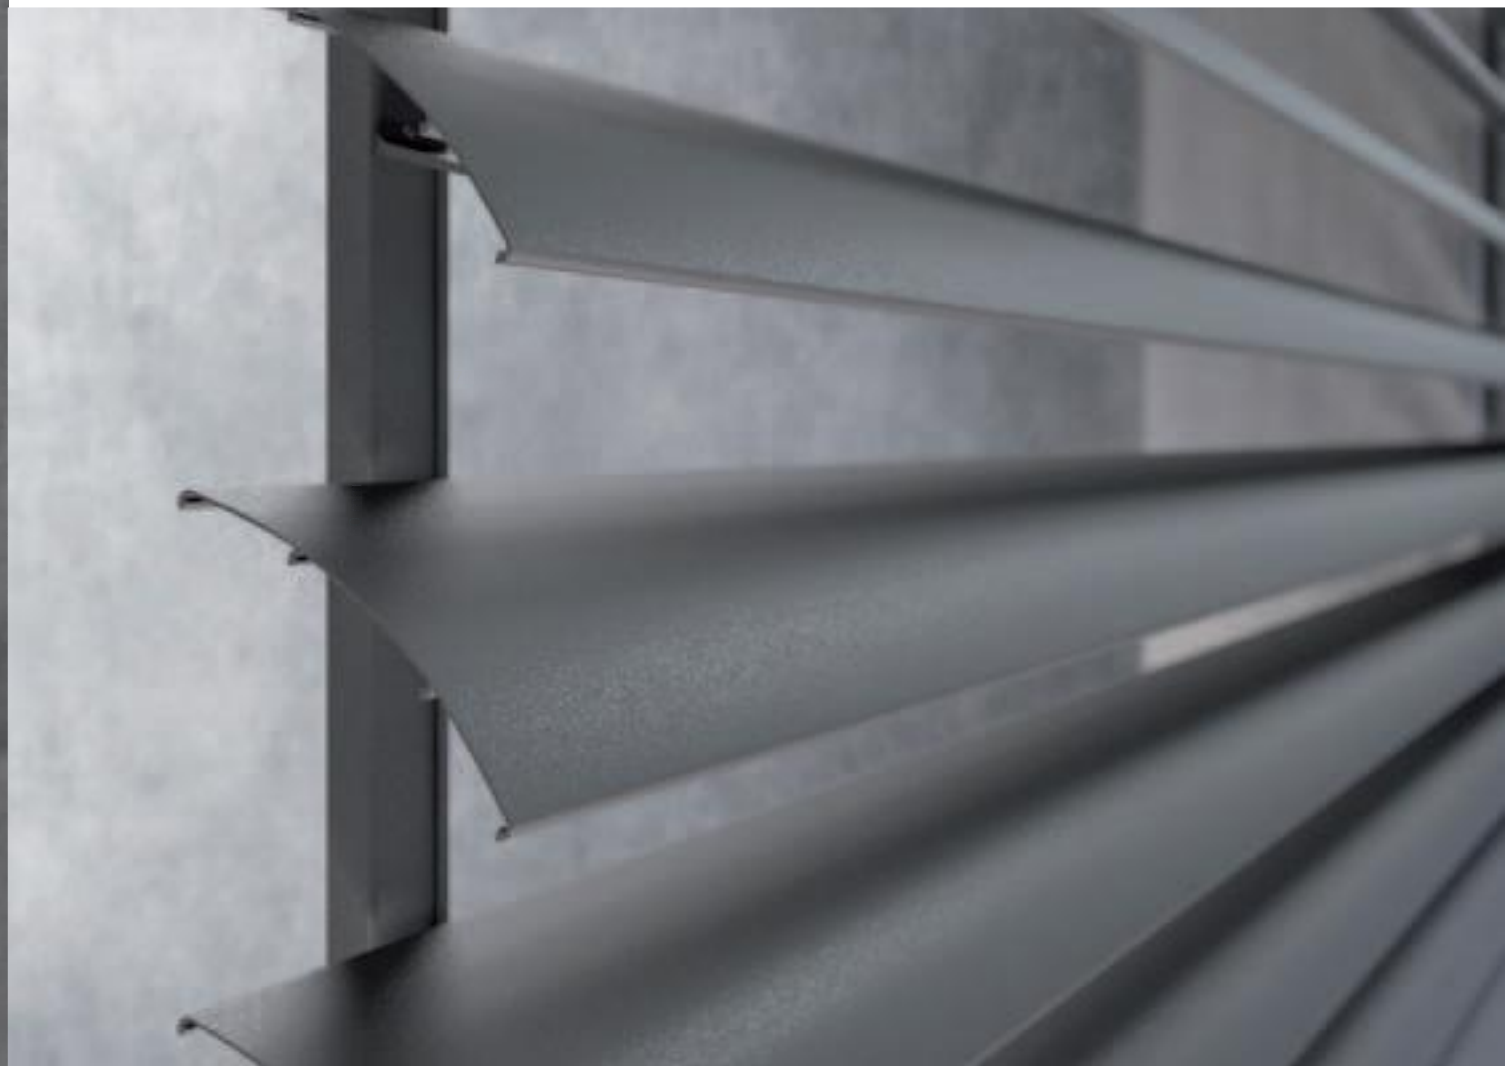


BBSA
BRITISH BLIND & SHUTTER ASSOCIATION